

CF625
FM Low Pass Harmonic Filter
87.5 MHz to 108 MHz
44 kW avg.

The filter is a stepped-impedance Low Pass Harmonic Filter in 6-1/8" coaxial line.

Part Number: CF625

Output Power Rating: 44 kW avg. max


Input VSWR: 1.10 : 1 or better over 87.5 MHz to 108 MHz

Insertion Loss: 0.1 dB max over 87.5 MHz to 108 MHz

Rejection: 45 dB min. at 2nd to 5th harmonic

Input/Output: 6-1/8", 50 ohm EIA Flanged

Length: 54.00" (137.16 cm) *see drawing below*

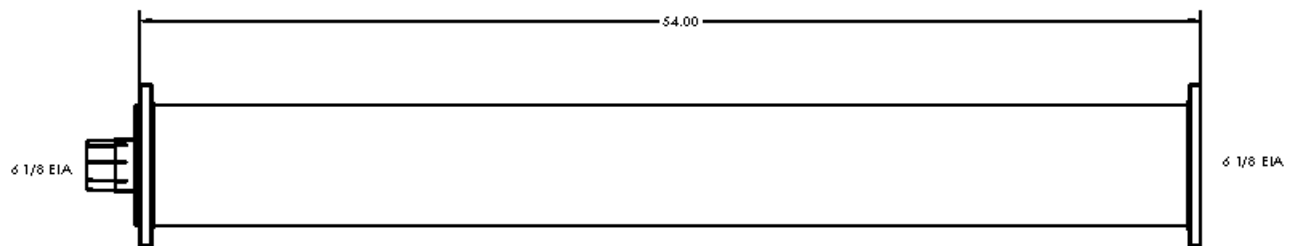

Note: Options for assembly with Directional Couplers and/or Reducers are also available, please contact factory for pricing and delivery.

Electronics Research, Inc. • 7777 Gardner Road • Chandler, IN 47610-9219 • USA
+1 812 925-6000 (tel) • +1 812 925-4030 (fax)

Your Single Source for Broadcast Solutions™ • Call Toll-free at 877 ERI-LINE • Visit Online at www.eriinc.com